



Endura-Flo™

High Pressure Diaphragm Pumps




High Pressure and Flow Rate in a Small, Compact Pump

- Superior durability for abrasive materials and extreme operating conditions
- Innovative design ensures easy access to critical components for fast, online repair
- Minimal solvent to flush and consistent startup pressure make it perfect for multiple color change and pigging systems
- Pumps are easily configurable for custom installations

PROVEN QUALITY. LEADING TECHNOLOGY.

Save Time and Money with Less Downtime

Don't risk unscheduled downtime because of equipment failure. The simple design of Endura-Flo not only ensures long-lasting durability, but it also withstands runaway conditions better than other diaphragm pumps. This easy-to-install pump offers low pulsation output and smooth changeover for quick color changes, saving you time and money. Plus it has the highest pressure ratio in the industry at 4:1.

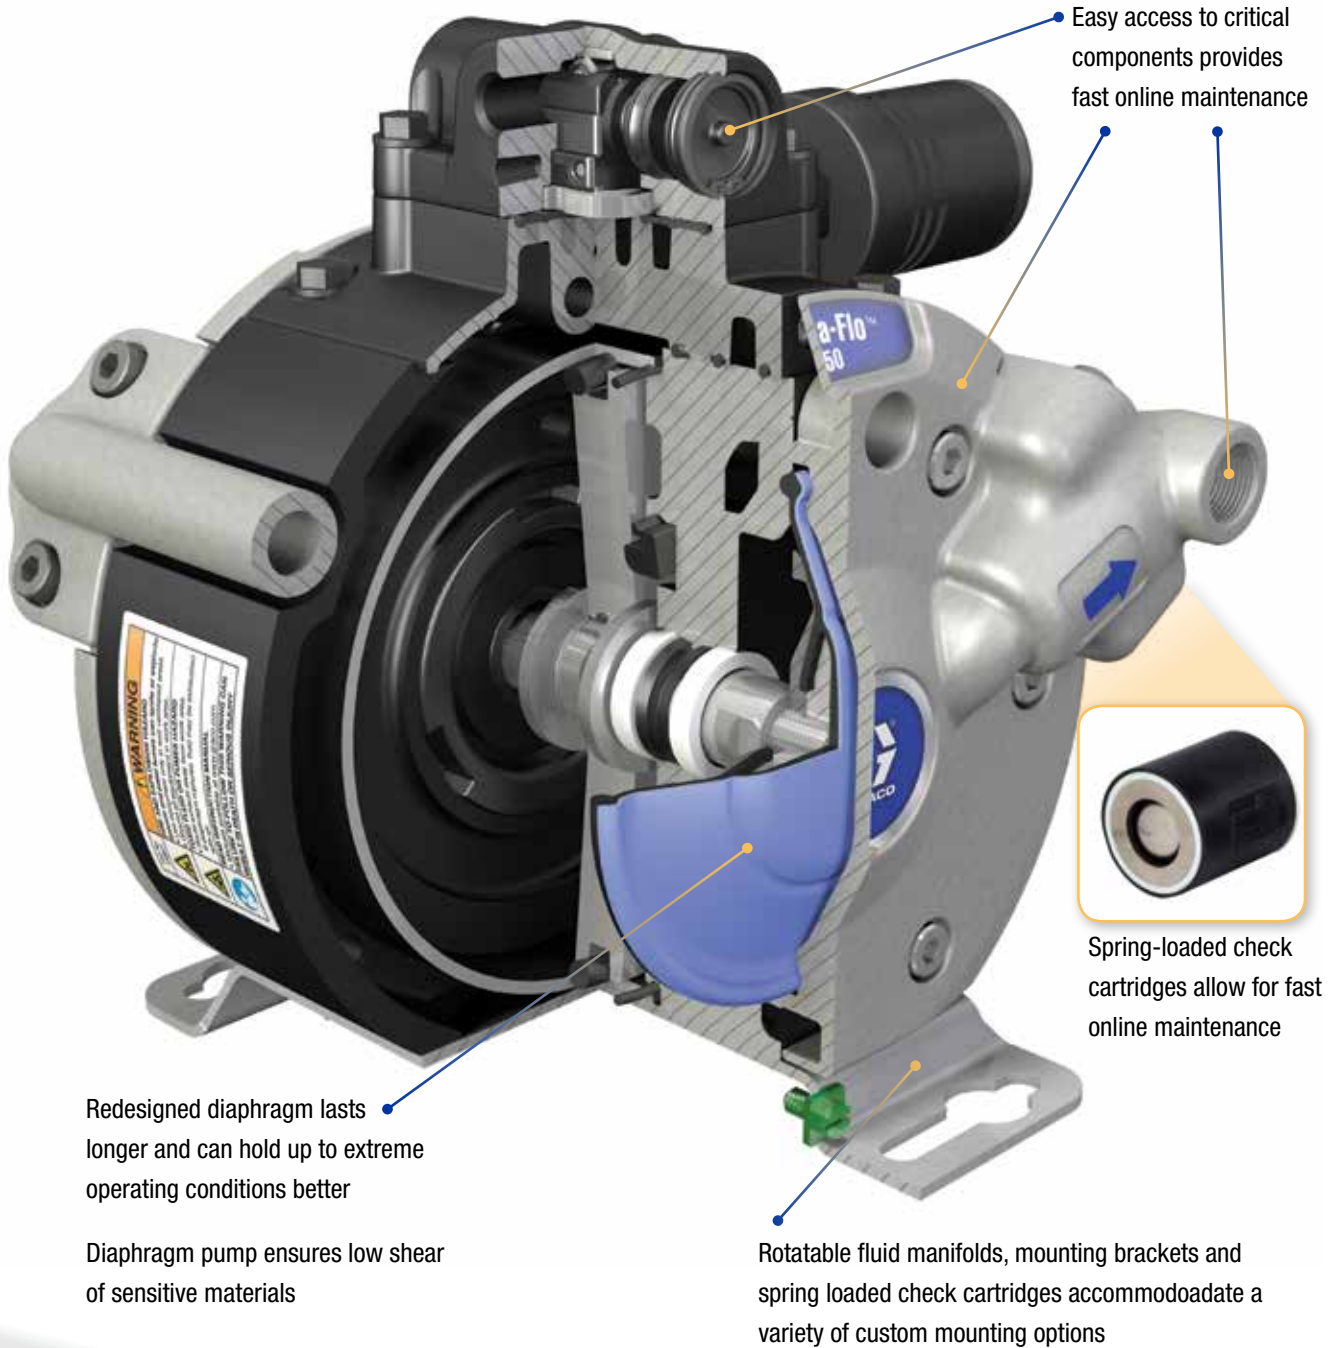

Automated Reporting

Environmental regulations are on the rise and keeping up with them is no easy task. Consider doing away with time consuming and costly manual reporting and try automated reporting instead. With the help of DataTrak, the Endura-Flo does all of the data recording work for you.

Upgrade to DataTrak™

- Easy-to-set runaway protection
- Pump diagnostics for maintenance
- Resettable batch counter tracks material usage and maintenance schedule



Ideal Solution for Multiple Color Change and Piggable Systems


- Fluid section can be purged with air or solvent
- Requires very little solvent to flush
- Unique fluid flow design efficiently flushes pump
- Consistent startup pressure

Typical Fluids Handled

- Waterborne and solventborne paints
- Catalyzed coatings
- Moisture-sensitive materials
- UV-cure coatings

Typical Applications

- Piggable paint systems
- Paint circulation
- Fluid transfer and supply

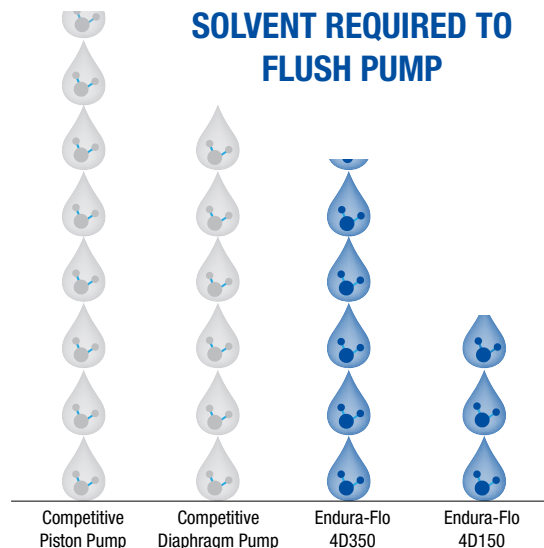

Ordering Information

Part No.	Description	Size	Manifolds	Datatrak
24W345	ENDURA-FLO 4D150, TRI-CLAMP FITTINGS	150 cc	Tri-Clamp	No
24W346	ENDURA-FLO 4D150, NPT FITTINGS	150 cc	NPT	No
24W347	ENDURA-FLO 4D150, BSPP FITTINGS	150 cc	BSPP	No
24W348	ENDURA-FLO 4D150, TRI-CLAMP FITTINGS, DATATRAK	150 cc	Tri-Clamp	Yes
24W349	ENDURA-FLO 4D150, NPT FITTINGS, DATATRAK	150 cc	NPT	Yes
24W350	ENDURA-FLO 4D150, BSPP FITTINGS, DATATRAK	150 cc	BSPP	Yes
24W351	ENDURA-FLO 4D350, TRI-CLAMP FITTINGS	350 cc	Tri-Clamp	No
24W352	ENDURA-FLO 4D350, NPT FITTINGS	350 cc	NPT	No
24W353	ENDURA-FLO 4D350, BSPP FITTINGS	350 cc	BSPP	No
24W354	ENDURA-FLO 4D350, TRI-CLAMP FITTINGS, DATATRAK	350 cc	Tri-Clamp	Yes
24W355	ENDURA-FLO 4D350, NPT FITTINGS, DATATRAK	350 cc	NPT	Yes
24W356	ENDURA-FLO 4D350, BSPP FITTINGS, DATATRAK	350 cc	BSPP	Yes

Kits

Part No.	Description
17H315	FLOOR STAND KIT
17H319	ENDURA-FLO 4D150 STANDARD AIR VALVE
17H318	ENDURA-FLO 4D150 DATATRAK AIR VALVE
17H317	ENDURA-FLO 4D350 STANDARD AIR VALVE
17H316	ENDURA-FLO 4D350 DATATRAK AIR VALVE
24Y304	ENDURA-FLO 4D150 DATATRAK CONVERSION KIT*
24Y306	ENDURA-FLO 4D350 DATATRAK CONVERSION KIT*

* Kit Includes replacement air valve compatible with solenoid

Technical Specifications

	150cc Model	350cc Model
Maximum fluid working pressure	400 psi (28 bar)	400 psi (28 bar)
Maximum air input pressure	100 psi (7 bar)	100 psi (7 bar)
Ratio	4:1	4:1
Maximum Recommended Continuous Cycle Rate	20 cpm	20 cpm
Fluid Flow at 60 cpm	2.4 gpm (9.0 lpm)	5.5 gpm (21.0 lpm)
Volume per cycle (double stroke)	150cc	350cc
Fluid Inlet	1 in. Tri-Clamp, 1/2 in NPT, or 1/2 in BSPP	1 in. Tri-Clamp, 3/4 in NPT, or 3/4 in BSPP
Fluid Outlet	1 in. Tri-Clamp, 1/2 in NPT, or 1/2 in BSPP	1 in. Tri-Clamp, 3/4 in NPT, or 3/4 in BSPP
Pump Manual	333015	333015

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Call today for product information or to request a demonstration.
800.328.0211 or visit us at www.graco.com/finishing

©2015 Graco Inc. Form No. 345086 Rev. B 12/15 Electronic Only.
 All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

